

HEADQUARTERS

FAAC spa
Via Calari 10 - 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
info@faac.it - www.faacgroup.com

FAAC SUBSIDIARIES

FAAC AG
Tel. +41 41 8713440
Fax +41 41 8713484
Altdorf, Switzerland
www.faac.ch

FAAC FRANCE
Tel. +33 4 72218700
Fax +33 4 72218701
Corbas, France
www.faac.fr

FAAC GMBH
Tel. +49 8654 49810
Fax +49 8654 498125
Freilassing, Germany
www.faac.de

FAAC MIDDLE EAST BRANCH
Tel. +971 42146733
Fax +971 42146734
Dubai Airport Free Zone, UAE
www.faac.ae

F.A.A.C. SA
Tel. +34 91 6613112
Fax +34 91 6610050
Madrid, España
www.faac.es

FAAC UK LTD.
Tel. +44 1256 318100
Fax +44 1256 318101
Basingstoke Hampshire, UK
www.faac.co.uk

FAAC AUSTRALIA PTY LTD
Tel. +61 2 87565644
Fax +61 2 87565677
Homebush – Sydney, Australia
www.faac.com.au

FAAC NORD
Tel. +33 1 69191620
Fax +33 1 69191621
Massy, France
www.faac.fr

FAAC INDIA PVT. LTD
Tel. +91 120 3934100/4199
Fax +91 120 4212132
Noida – Delhi, India
www.faacindia.com

FAAC POLSKA SP.ZO.O.
Tel. +48 22 8141125
Fax +48 22 8142024
Warszawa, Polska
www.faac.pl

F.A.A.C. SA Delegación Cataluña
Tel. +34 93 4362000
Fax +34 93 4368225
Barcelona, España
www.faac.es

FAAC BENELUX
Tel. +32 50 320202
Fax +32 50 320242
Brugge, Belgium
www.faacbenelux.com


FAAC GE.S. M.B.H.
Tel. +43 662 8533950
Fax +43 662 85339520
Wals – Siezenheim, Austria
www.faac.at

FAAC INTERNATIONAL INC.
Tel. +1 307 6351991
Fax +1 307 6328148
Cheyenne, USA
www.faacusa.com


FAAC SCANDINAVIA AB
Tel. +46 36 376860
Fax +46 36 370780
Bankeryd, Sweden
www.faac.se

FAAC SHANGHAI
Tel. +86 21 68182970
Fax +86 21 68182968
Shanghai, China
www.faac.com.cn

500 - Zucchini - 09/2009. The descriptions and illustrations contained in the present brochure are not binding. FAAC reserves the right to undertake product technical modifications without prior notice.

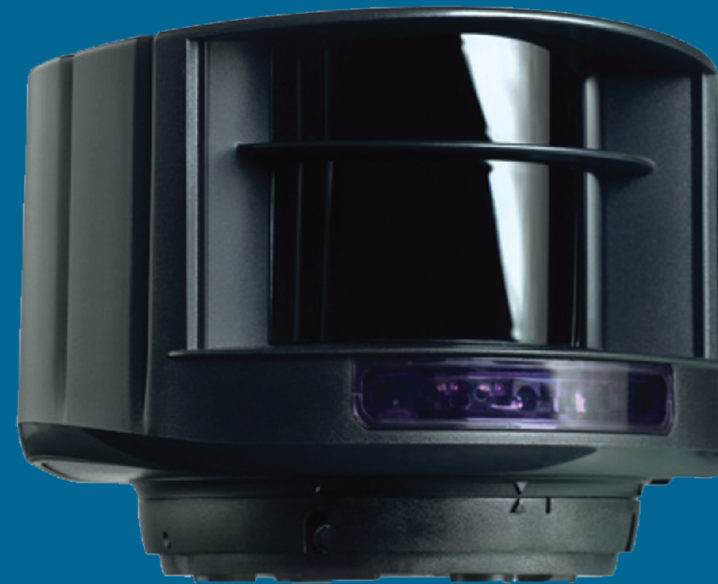

XGuard 5

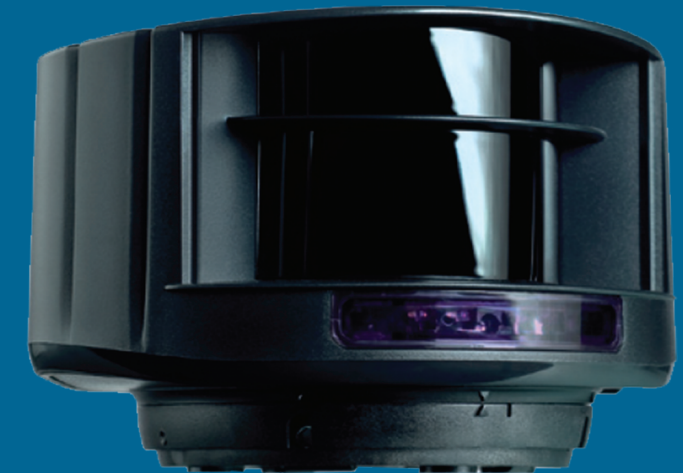

XGuard 10

LASER SCANNERS


Safety sensors for industrial doors and gates



FAAC
Simply automatic.

XGuard 5 / XGuard 10

Safety Sensors for industrial doors and gates

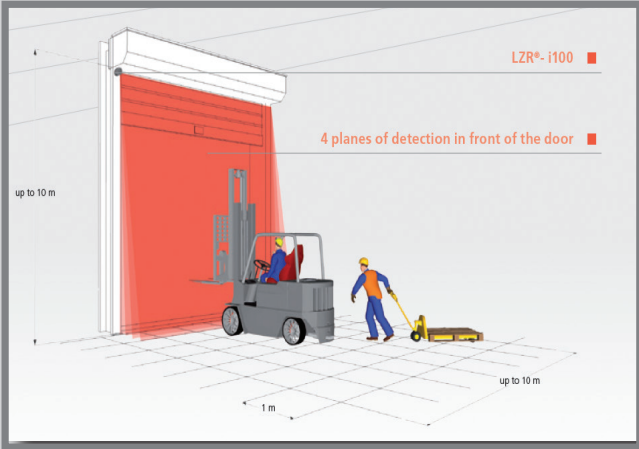

Performance


- Maximum detection range:
 - Xguard 10 9.9m x 9.9m
 - Xguard 5 5m x 5m
- Variable depth of plane (0.5m (XGuard 5)/1m (XGuard 10) max) according to the installation height
- High performance safety solution for industrial doors certified PL “d”/CAT 2 according to EN ISO 13849-1 and Type E according to EN12453
- High level of safety with a complete three-dimensional detection in front of the door
- Detection of small objects*
- Replaces current solutions such as contact edges, light beams and lightgrids
- Easy installation for new and retrofit applications

* Up to a few centimeters depending on the application

Technical Specifications

Technology	LASER scanner, time of flight measurement
Detection mode	Presence (EN 12453 Type E)
Max Detection range	5m x 5m (XGuard 5) 9.9m x 9.9m (XGuard 100)
Remission factor	>2%
Angular resolution	0.3516°
Typ min object size	2.1cm@3m/3.5cm@5m / (7cm@10m (i100)) (in proportion to object distance)
Testbody	700mm x 300mm x 200mm (testbody A according to EN 12445)
Emission characteristics	Wavelength 905 nm; max. output pulse power 75W; Class 1
IR LASER	Wavelength 650 nm; max ouput CW power 3mW; Class 3R
Red visible LASER	
Supply voltage	10-35V DC@sensor terminal
Power consumption	< 5W
Response time	Typ 20ms; max 80ms
Output	2 electronic relays (galvanic isolation - polarity free)
max switching voltage	35V DC/24V AC
max switching current	80mA (resistive)
LED signals	1 blue LED: power on status 1 orange LED: error status 2 bi-coloured LED:detection/output status
Dimensions	125mm (L) x 93mm (D) x 70mm (H) (mounting bracket +14mm)
Material	PC/ASA
Colour	Black
Rotation angles on bracket	-5° to +5° (lockable)
Tilt angles on bracket	-3° to +3°
Protection degree	IP65
Temperature range	-30°C to +60°C if powered
Humidity	0-95% non-condensing
Vibrations	<2G
Norm conformity	2006/95/EC: LVD; 2002/95/EC: RoHS 2; 2004/108/EC: EMC; 2006/42/EC: MD; EN12453:2000 chapter 5.1.1.6, chapter 5.5.1 Safety device E; EN 12978:2009; EN ISO 13849-1: 2008 PI “d”/CAT2; EN 60529: 2001;IEC 60825-1: 2007; EN 60950-1: 2005; EN 61000-6-2: 2005; EN 61000-6-3: 2006; IEC 61496-1: 2009; EN61496-3: 2008 ESPE Type 2; EN 62061:2005 SIL 2; DIN 18650-1: 2010 Chapter 5.7.4


On sliding gates

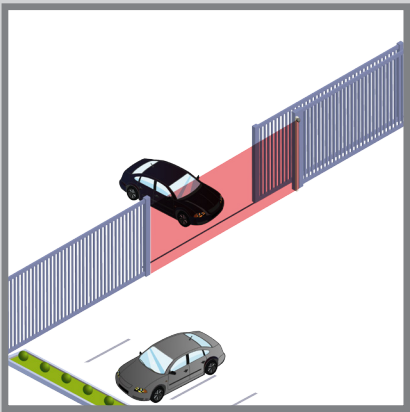

Premium Safety Solution for industrial doors



On swing gates

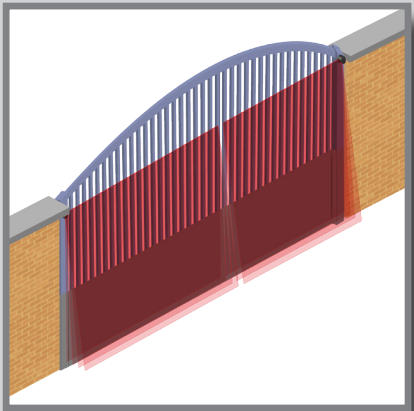

Virtual Push button



Applications:

- Safety at the opening and closing of the door thanks to 2 separate detection areas
- Possibility to create 2 virtual push buttons to open the door/gate

Designed for industrial environments:

- Filters door vibrations and environmental interferences
- Filters door leaf deformation by wind force
- Degree of protection: IP65

Ease of installation:

- Easy setting of the detection zone with 3 visible LASER beams
- Xguards require a universal remote for programming (order as separate engineers tool)
- Automatic door dimensions teach-in
- Cable of 10m provided
- Mounting bracket is available separately