

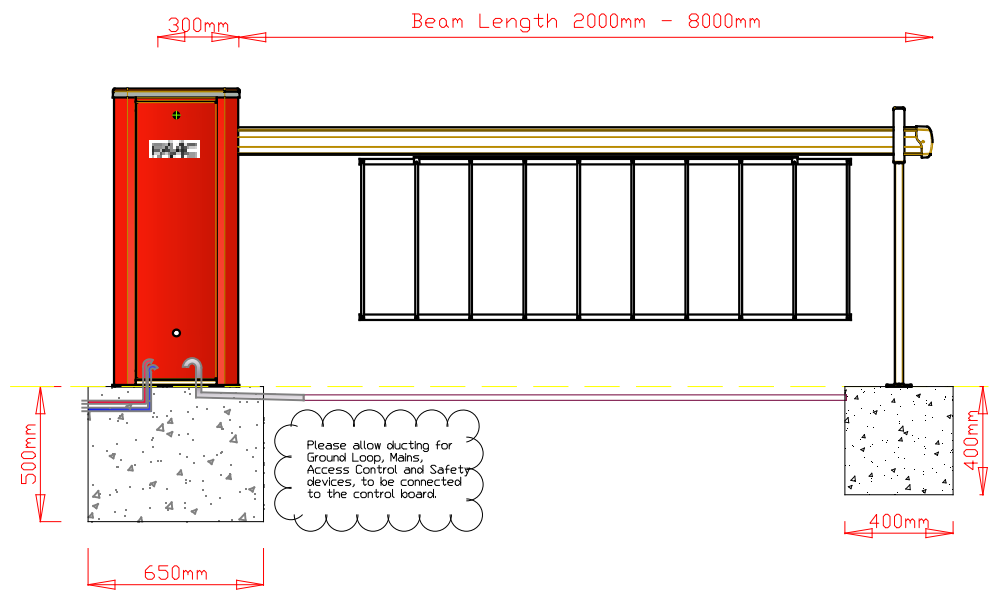


Loop Perimeter	Nr of Windings
Less than 3m	6
from 3 to 4m	5
from 4 to 6m	4
from 6 to 12m	3
more than 12m	2

Foundation Plate 490139



Please allow ducting for Ground Loop, Mains, Access Control and Safety devices, to be connected to the control board.

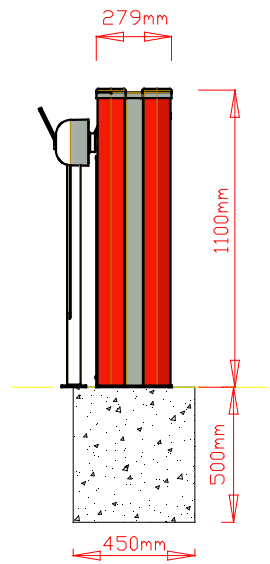

NOTES

A full and detailed Health Analysis and Risk Assessment will be required to determine if extra safeties are required. A summary of the installers responsibilities regarding the safety of gate systems can be found in the current gate guide document published by the DHF.

Cable Requirements:
 Loop cable - A standard unipolar cable 1.5mm², if laid below ground level then it must be double insulated.

Accessories:
 2.0 x 0.5mm²
 2.0 x 1.5mm²

Power:
 230V 3 x 1.5mm²

Designed by	Checked by	Approved by	File name B680H Inst	Date 2019	Scale NTS
FAAC (UK) Limited Unit 10 The Hatch Ind Park Greywell Road Basingstoke Hampshire RG24 7NG			Tel. 01256 318100 Fax. 01256 318101 Tech. 01256 318111 Email sales@faac.co.uk Web. www.faac.co.uk		
B680 Typical Installation requirements				Edition EDITION	Sheet SHEET