

HEADQUARTERS

FAAC spa
Via Calari 10 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
info@faac.it - www.faacgroup.com

FAAC SUBSIDIARIES

FAAC AG
Tel. +41 52 3461721
Fax +41 52 3461723
Illnau, Switzerland
www.faac.ch

FAAC FRANCE
Tel. +33 472218700
Fax +33 472218701
Corbas, France
www.faac.fr

FAAC GMBH
Tel. +49 8654 49810
Fax +49 8654 498125
Freilassing, Germany
www.faac.de

FAAC MIDDLE EAST
Dubai, Emirati Arabi
www.faac.ae
info@faac.ae

F.A.A.C. SA
Tel. +34 91 6613112
Fax +34 91 6610050
Madrid, España
www.faac.es

FAAC UK LTD.
Tel. +44 1256 318100
Fax +44 1256 318101
Basingstoke Hampshire, UK
www.faac.co.uk

FAAC AUSTRALIA PTY LTD
Tel. +61 2 7565644
Fax +61 2 87565677
Homebush – Sydney, Australia
www.faac.com.au

FAAC NORD
Tel. +33 1 69191620
Fax +33 1 69536069
Massy, France
www.faac.fr

FAAC INDIA PVT. LTD
Tel. +91 120 3934100/4199
Fax +91 120 4212132
Noida – Delhi, India
www.faacindia.com

FAAC POLSKA SP.ZO.O.
Tel. +48 22 8141125
Fax +48 22 8142024
Warszawa, Polska
www.faac.pl

F.A.A.C. SA Delegación Cataluña
Tel. +34 93 4362000
Fax +34 93 5727994/4368225
Barcelona, España
www.faac.es

FAAC BENELUX
Tel. +32 50 320202
Fax +32 50 32024215
Brugge, Belgium
www.faac.be

FAAC G.E.S. M.B.H.
Tel. +43 662 8533950
Fax +43 662 85339520
Wals – Siezenheim, Austria
www.faac.at

FAAC INTERNATIONAL INC.
Tel. +1 307 6351991
Fax +1 307 6328148
Cheyenne, USA
www.faacusa.com

FAAC SCANDINAVIA AB
Tel. +46 36 376860
Fax +46 36 370780
Bankeryd, Sweden
www.faac.se

FAAC SHANGHAI
Tel. +86 21 68182970
Fax +86 21 68182968
Shanghai, China
www.faac.com.cn




402 Hydraulic operator for swing-leaf gates

FAAC

THE 402 operator has 3 model variants and is suitable for gate leaves up to 3m.

- It is a highly compact operator, ideal for installations where space is at a premium.
- Max anti-crushing safety thanks to an exclusive hydraulic device
- anti-corrosion cover with high weather resistance
- Versions CBC (with closing lock), SB (without closing lock) and SBS (slower operation for larger gate).

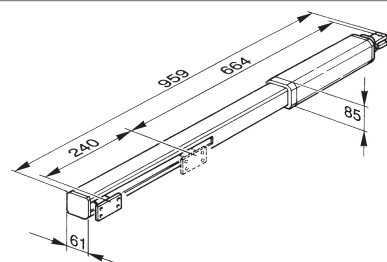

Dimensions of the unit.


Triangular manual release key



452 MPS control board



455D control board



TECHNICAL SPECIFICATIONS 402

	402 CBC/SB	402 SBS
Power supply voltage:	230 Vac 50/60 Hz	
Absorbed Power:	220W	
Absorbed current:	1A	
Motor rotation speed:	1400 rpm	
Speed of operation:	90° angle - 18.5s	90° angle - 24s
Pump flow rate:	1l/min	0.75 l/min
Traction and thrust force:	0 to 500 daN	0 to 690 daN
Operating ambient temperature:	-40°C - +55°C	
Thermal protection on motor winding:	120°C	
Weight:	6.5kg	
Type of oil:	FAAC HP oil	
Protection class:	IP65	
Single leaf max length (m)	1.8m	3m
Use frequency (cycles/hour)	55	55