



Please Note:
Field dimensions available with part No. N-785028 XGUARD-10 LASER SENSOR

A single XGuard laser scanner can be used to provide an arms-width exclusion zone (circa 700-800mm) either side of the boom to prevent all possible contact.

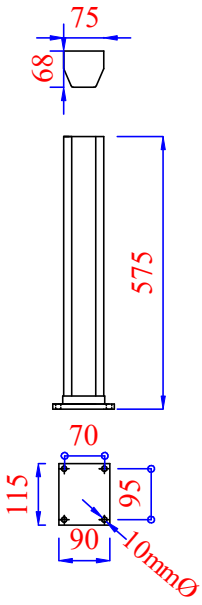

401028 Support Post

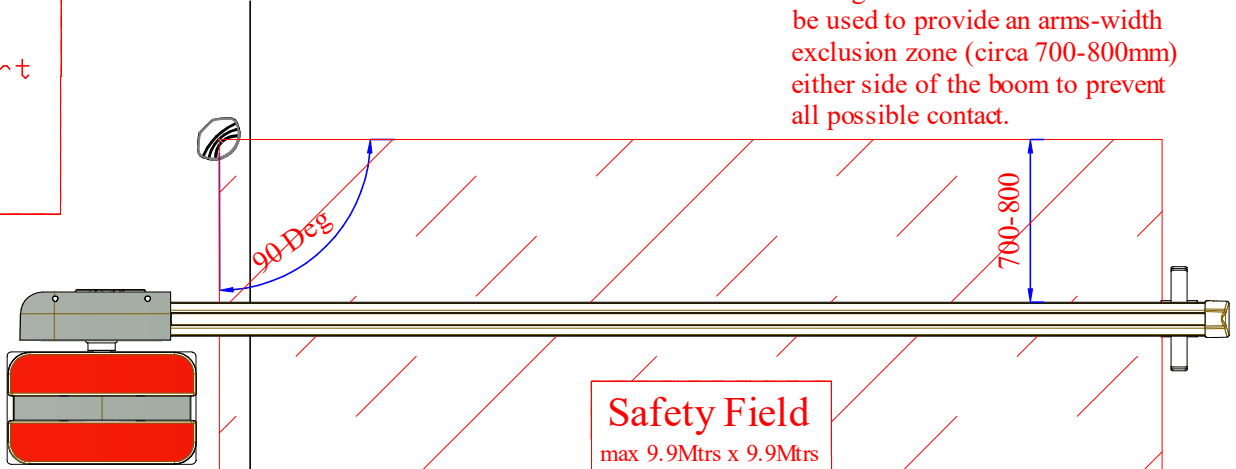


Safety Field
max 9.9Mtrs x 9.9Mtrs

Kerb Line

Optional Activation Field

The activation field can be programmed to filter out pedestrian movement.

Direction of Travel

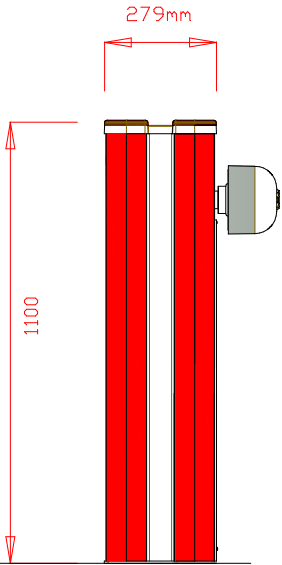

Kerb Line
Road surface

Height to road surface between 350 - 450mm

Itemref	Quantity	Note - DO NOT MANUFACTURE TO THESE DIMENSIONS	Article No./Reference
Designed by Anthony Parrish	Checked by	Approved by	File name
FAAC (UK) Limited Unit 10 The Hatch Ind Park Greywell Road Basingsbke Hampshire RG24 7NG	Tel. 01256 318100 Fax. 01256 318101 Tech. 01256 318111 Email sales@faac.co.uk Web. www.faac.co.uk		Date 21-03-20 Scale NTS
Standard B680 Barrier with Xguard Laser			Revision
XGuard laser safety for standard barrier			Sheet